
Work Instruction - Operations CONTINGENCY PLAN (ALTERNATE SERVICE PLAN) ### HITACHI ### CONTINGENCY PLAN (ALTERNATE SERVICE PLAN)

Plan No. 28	This plan handles 2 single-line blockages: at West Loch Station, and at West Oahu Station	
Terminus:	East Kapolei Station UP platform <->, Hoopili Station DOWN platform, and Hoopili Station UP platform<->Aloha	
	Stadium Station UP platform	

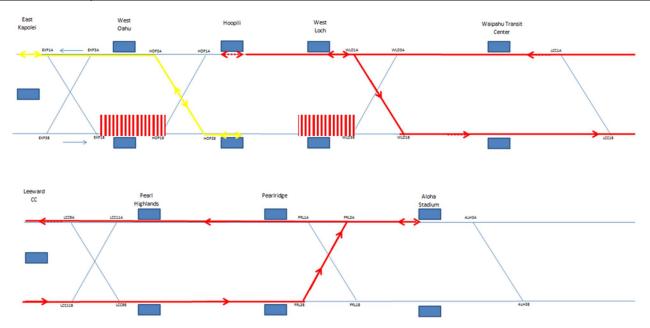

Additional Staff Requirements				
Station Operator(s) 1 to 2 additional staff required at West Oahu Station UP platform and West Loch Station UP platform				
	assist passengers going eastbound / westbound			

Staff Action		
Engineering & Fault Controller	Coordinate with maintainer to address the blockage	
Maintainer	Send maintenance unit to the scene to address the blockage De-energize and isolate the blocked area from the running line	
Train Controller	Set short turn back operation defined for this plan Set shuttle operation defined for this plan Remove excessive trains if required	
OCC Supervisor	Request additional workforce for West Oahu Station and West Loch Station	
Information Controller	Inform all stations about the new terminuses	
Station Operator(s) at (East Kapolei, West Oahu, West Loch) Station	Inform passengers to use the UP platform Assist passenger, monitor passenger flow, and prepare for crowd control	
Station Operator(s) at Hoopili Station	 Inform passengers to use the UP platform for trains to Aloha Stadium Station Inform passengers to use the DOWN platform for trains to East Kapolei Station Assist passenger, monitor passenger flow, and prepare for crowd control 	

End of No. 28

Document Code	HNL-09421 Contingency Plan (Alternate Service Plan).01	Effective Date:	
File Name	HNL-09421.00.00-1-Contingency Plan (Alternate Service Plan)	Rev No. 01	Page 31 of 32