
Work Instruction - Operations CONTINGENCY PLAN (ALTERNATE SERVICE PLAN) ### HITACHI ### CONTINGENCY PLAN (ALTERNATE SERVICE PLAN)

Plan No. 24	This plan handles a double lines blockage between West Loch Station and Waipahu Transit Center Station	
Terminus:	East Kapolei Station DOWN platform<->West Loch Station UP platform, and Waipahu Transit Center UP platform<-	
	>Aloha Stadium UP platform	

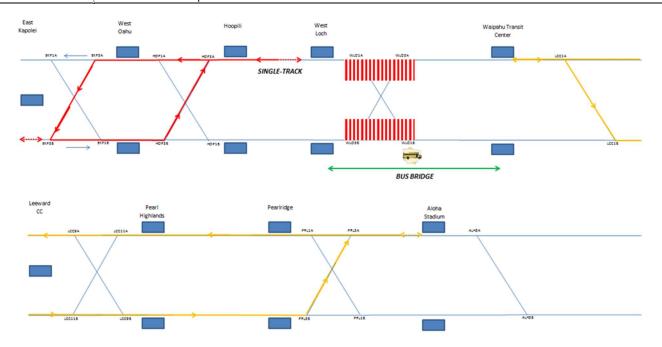

Additional Staff Requirements					
Station Operator(s)	1 to 2 additional staff required at West Loch Station and Waipahu Transit Station to assist passengers using the replacement bus services				

Staff Action	
Engineering & Fault Controller	Coordinate with maintainer to address the blockage between West Loch Station and Waipahu Transit Center Station
Maintainer	 Send maintenance unit to the scene to address the blockage De-energize and isolate the blocked area from the running line
Train Controller	 Set short turn back operation defined for this plan remove excessive trains if required
OCC Supervisor	Request additional workforce for West Loch Station and Waipahu Transit Station
Information Controller	Inform UP track stations about the new terminus and the bus access point
Station Operator(s) at West Loch Station and Waipahu Transit Station	 Coordinate replacement bus services Arrange Station Operators to assist passengers Assist passenger, monitor passenger flow, and prepare for crowd control

End of No. 24

Document Code	HNL-09421 Contingency Plan (Alternate Service Plan).01	Effective Date:	
File Name	HNL-09421.00.00-1-Contingency Plan (Alternate Service Plan)	Rev No. 01	Page 26 of 32